

3-Stage Battery Charger

300Watt, 20Amp

SARGENT
wired for innovation



The PX300 multi-stage battery charger is ideal for leisure applications, providing power for both battery charging and 12 volt appliances within a very compact size. The unit can run silently even under full load, due to its efficient fanless design.



PX300-12

Specification	PX300-12
Power	300W
Input Voltage	90-264VAC
Charging Current (max)	20A @14.5V
Boost Voltage	14.4V
Float Voltage	13.6V
Compatible batteries	Flooded, AGM *
Battery size	85 - 220Ah
Colling method	Passive
Dimensions (LxWxH)	240x135x48mm
Weight	1.18kg

* its is recommended to confirm compatibility with the manufacturer, for the specific battery being used

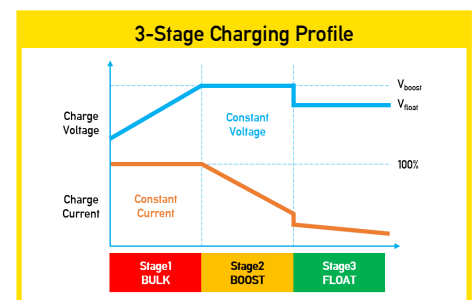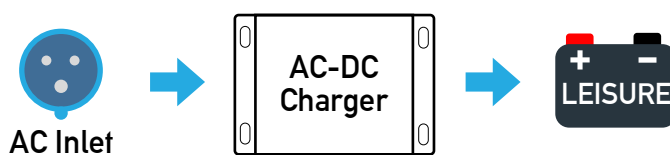

- **Multi-Stage charging** - 3-Stage profile maximises charge into the leisure battery
- **High capacity output** - up to 20Amps for charging batteries from 85 to 220Ah
- **High efficiency** - ensures cool running, suitable for use in restricted spaces
- **Silent operation** - from fanless cooling
- **Fully protected** - built-in overload, short circuit & over temperature protection